


SPECIFICATION

Contact Rating : 10A 250V T55
6A/100A 250V ~ T85/55
Contact Resistance : 20mΩ (MAX)
Insulation Resistance : 500MΩ (MIN) 500V DC
Dielectric Strength : 2000V AC-1minute
Electric Life : 10,000 cycles
Operating Force : 900 ± 300gram



PART NUMBERING SYSTEM

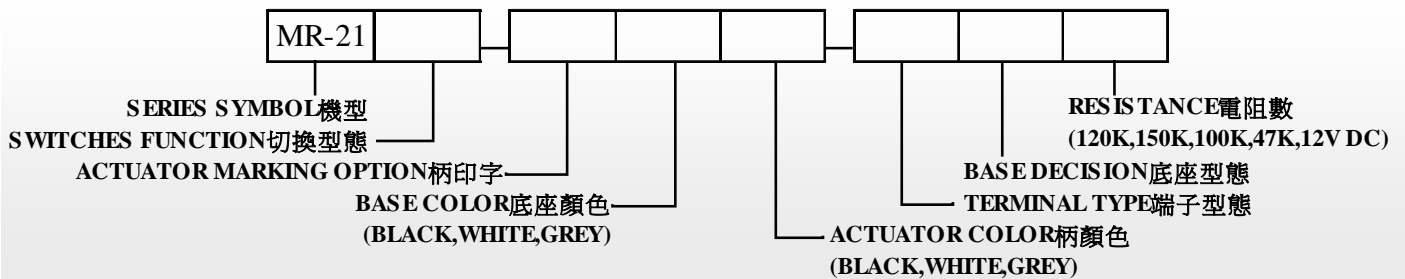

DIMENSIONS

in mm

MOUNTING HOLE

ACTUATOR MARKING OPTION

CODE : 2	CODE : 3	CODE : 4
CODE : 6	CODE : 8	CODE : B
CODE : C		

BASE TYPE

	CODE	2	3	1	6
L	7.6	4.8	0	7.6	
X	2	2	2	1	

SWITCH FUNCTION

CODE	LEFT	CENTER	RIGHT
F 1 1A	OFF	NONE	NO
M 2 2A	OFF	NONE	NO
N 2 POLE	OFF	NONE	NO
D 1 1A	OFF	NONE	NO
C 2 2A	OFF	NONE	NO
L 2 POLE	OFF	NONE	NO

SCHEMATIC

Panel Thickness	Dim.x	Dim.Y
0.75-1.25	19.2/19.1	13.0/12.9
1.25-2.0	19.4/19.3	13.0/12.9
2.0-3.0	19.8/19.7	13.0/12.9

ANGLED PC-TERMINAL

CODE	A	T	U
X	5.3	5.3	3.5
Y	7.0	5.0	5.0

CODE	E	K	R
X	5.3	5.3	3.5
Y	7.0	5.0	5.0

TERMINAL TYPE

	PLUG-IN TERMINAL 4.8	CODE	F	W
		Y	8.3	4.7
	SOLDER TERMINAL	CODE	Q	L
		X	3.5	5.0
	PC-TERMINAL	CODE	P	V
		X	12.5	8.8