

SPECIFICATION

Contact Rating : 10A 250V AC

15A 250V AC


Insulation Resistance : 100 MΩ (MIN) 500V DC

Dielectric Strength : 2000V AC-1 minute


Operational Temperature : 0~85 °C



PART NUMBERING SYSTEM

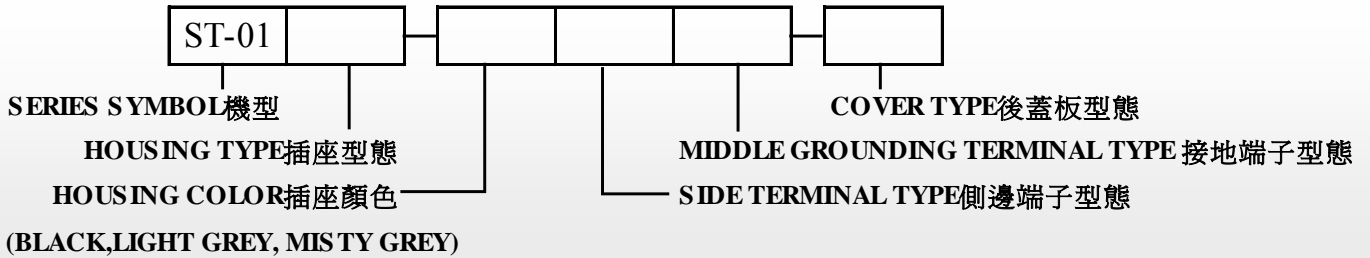

DIMENSIONS in mm

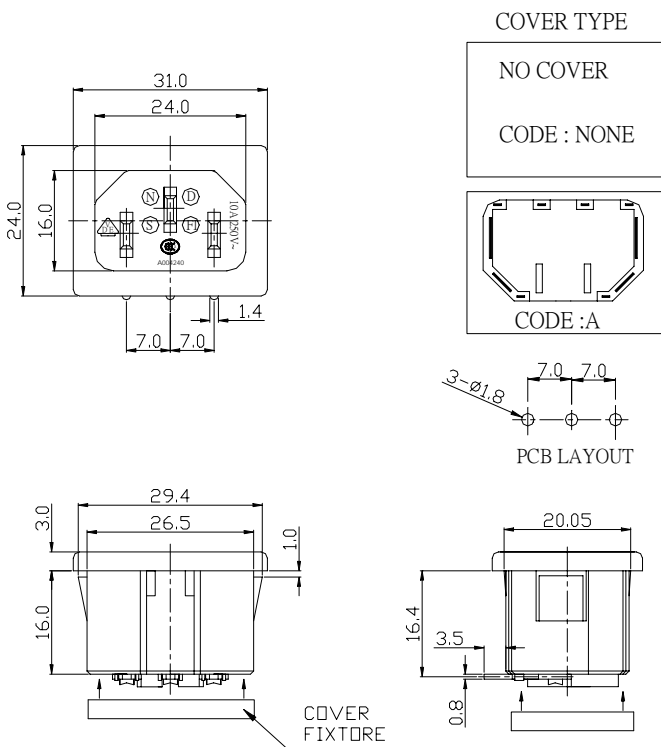

HOUSING TYPE	SIDE TERMINAL TYPE																																																					
	PC-TERMINAL	SOLDER TERMINAL																																																				
 <table border="1"> <thead> <tr> <th>CODE</th> <th>H</th> <th>W</th> <th>AB</th> <th>AC</th> <th>AC</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.5</td> <td>2.0</td> <td>1.5</td> <td>2.0</td> <td>2.0</td> </tr> <tr> <td>X</td> <td>19.8</td> <td>-</td> <td>20.2</td> <td>-</td> <td>20.0</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>CODE</th> <th>B</th> <th>C</th> <th>BU</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.0</td> <td>0.8</td> <td>2.0</td> </tr> </tbody> </table>	CODE	H	W	AB	AC	AC	A	1.5	2.0	1.5	2.0	2.0	X	19.8	-	20.2	-	20.0	CODE	B	C	BU	A	1.0	0.8	2.0	 <table border="1"> <thead> <tr> <th>CODE</th> <th>X</th> </tr> </thead> <tbody> <tr> <td>M</td> <td>5.3</td> </tr> <tr> <td>P</td> <td>3.2</td> </tr> <tr> <td>2</td> <td>3.0</td> </tr> <tr> <td>5</td> <td>3.7</td> </tr> </tbody> </table>	CODE	X	M	5.3	P	3.2	2	3.0	5	3.7	 CODE : 5																
CODE	H	W	AB	AC	AC																																																	
A	1.5	2.0	1.5	2.0	2.0																																																	
X	19.8	-	20.2	-	20.0																																																	
CODE	B	C	BU																																																			
A	1.0	0.8	2.0																																																			
CODE	X																																																					
M	5.3																																																					
P	3.2																																																					
2	3.0																																																					
5	3.7																																																					
MIDDLE GROUNDING TERMINAL TYPE																																																						
 <table border="1"> <thead> <tr> <th>CODE</th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>NONE</td> <td>3.5</td> <td>7.3</td> <td>-</td> </tr> <tr> <td>1</td> <td>3.5</td> <td>5.9</td> <td>-</td> </tr> <tr> <td>6</td> <td>-</td> <td>-</td> <td>1.7</td> </tr> <tr> <td>AE</td> <td>3.7</td> <td>-</td> <td>-</td> </tr> <tr> <td>N</td> <td>3.5</td> <td>-</td> <td>-</td> </tr> <tr> <td>M</td> <td>5.3</td> <td>-</td> <td>-</td> </tr> <tr> <td>AU</td> <td>-</td> <td>5.9</td> <td>-</td> </tr> <tr> <td>BA</td> <td>5.0</td> <td>5.9</td> <td>-</td> </tr> <tr> <td>AE</td> <td>3.7</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	CODE	X	Y	Z	NONE	3.5	7.3	-	1	3.5	5.9	-	6	-	-	1.7	AE	3.7	-	-	N	3.5	-	-	M	5.3	-	-	AU	-	5.9	-	BA	5.0	5.9	-	AE	3.7	-	-	 <table border="1"> <thead> <tr> <th>CODE</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>F</td> <td>3.2</td> <td>7.3</td> </tr> <tr> <td>AF</td> <td>3.2</td> <td>6.5</td> </tr> <tr> <td>BE</td> <td>5.0</td> <td>6.5</td> </tr> </tbody> </table>	CODE	X	Y	F	3.2	7.3	AF	3.2	6.5	BE	5.0	6.5	
CODE	X	Y	Z																																																			
NONE	3.5	7.3	-																																																			
1	3.5	5.9	-																																																			
6	-	-	1.7																																																			
AE	3.7	-	-																																																			
N	3.5	-	-																																																			
M	5.3	-	-																																																			
AU	-	5.9	-																																																			
BA	5.0	5.9	-																																																			
AE	3.7	-	-																																																			
CODE	X	Y																																																				
F	3.2	7.3																																																				
AF	3.2	6.5																																																				
BE	5.0	6.5																																																				
 CODE : 5	 CODE : AD																																																					