

### SPECIFICATION

Contact Rating : 10A 250V AC 15A 250V AC


Insulation Resistance : 100 MΩ (MIN) 500V DC

Dielectric Strength : 2000V AC-1 minute

Operational Temperature : -10 °C ~ 85 °C



### PART NUMBERING SYSTEM

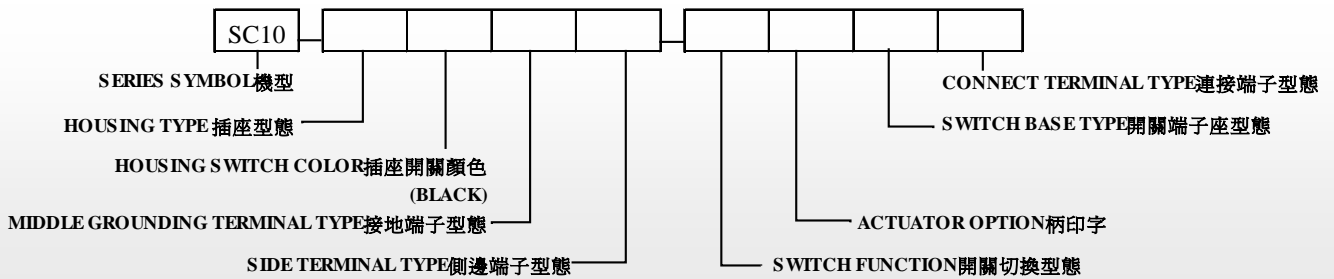

### DIMENSIONS

in mm

